

**BRUSH  
WOLF**

# BRUSH CUTTERS

FOR EXCAVATORS & BACKHOES



**THE LEADER OF THE PACK—ANY WAY YOU CUT IT.**



# THE LEADER OF THE PACK

any way you cut it.



Brush Wolf Features .....	2-3
The Brush Wolf Difference.....	4-5
Standard-Duty X-Series .....	6-7
Heavy-Duty X-Series .....	8-9
Full-Size Heavy-Duty X-Series .....	10-11
Cutter Comparison Chart.....	12-13



# BUILT FOR LIFE

Experience the most reliable, indestructible hydraulic rotary brush cutters on the market. All Brush Wolf cutters are engineered with advanced features that lead the way in innovative design and development.

## BLADE ACCESS COVER

Direct access to the blade bolts through the blade access cover makes replacing blades quick and hassle-free.

## REINFORCED GUSSETS

We went above and beyond to make sure our cutters are crazy strong by adding boxed-in gusset reinforcements, extra bracing, and supports.

## GEARBOX SEAL PROTECTION

Welded collar around the gearbox seal prevents wire from damaging the gearbox.

## BLADE CARRIER

Ultra-smooth, CNC-balanced blade carriers prevent unnecessary vibration.

## LONG-LASTING BLADES

Our high-tempered, industrial-strength steel blades are heat treated, have a milled edge, and are Supertuf coated to stand the test of time.



## POWDER-COATED TOUGH

Protected with the most durable finishing process, we powder coat every part to minimize rust, resist scratches, and prevent fading, so you get more life out of your brush cutter.



# POWER + PERFORMANCE

## MOTOR GUARD / HOOD

The motor guard/hood is crafted from durable 12-gauge steel and is hinged for effortless motor access.

## PLUG + PLAY READY

Ready to shred brush upon delivery with quick-connect couplers, hydraulic hoses encased in protective wrap, and dust caps.

## PREMIUM HYDRAULIC MOTORS

Powered by a high-performance radial piston motor with a robust bearing housing OR a Geroler-style hydraulic motor paired with a right-angle gearbox for ultimate efficiency. Added pressure relief valves safeguard your motor from pressure spikes and allow for a faster shutdown.



## PILOT GUARD

We took safety to the next level by welding a reinforced plate "pilot guard" to the underside of the cutter deck to protect you from flying objects.

## SEAM WELDING

Unlike our competitors, Brush Wolf's deck and frame construction is fully boxed and continuously welded across each seam for an indestructible, rust-proof support structure.

## CHAIN CURTAINS

5/16" replaceable safety chains contain flying debris to protect you and your cutter and aid in mulching.


## ULTRA-RUGGED DECK FRAME

We build each deck frame from a single piece of formed heavy-duty steel, never pieced together. This means our frames are consistently better made and more durable, with the elimination of construction errors and frame failure.

## CUSTOMER SERVICE + SUPPORT

The customer is always KING. We're with you every step of the way with unlimited support.



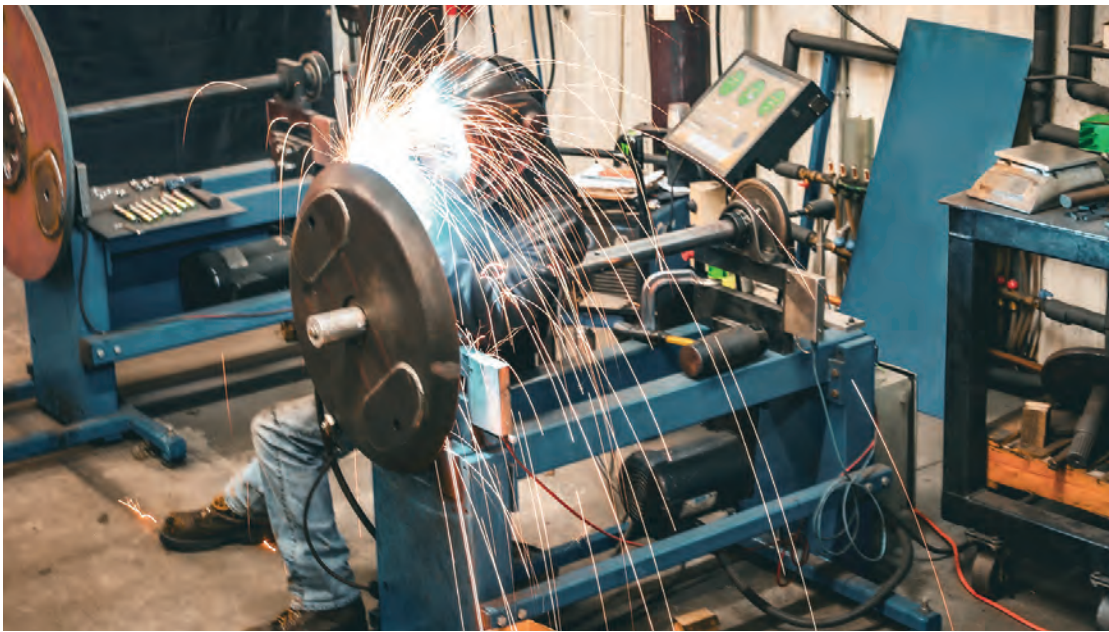

### WHY OUR CUTTERS LAST LONGER

Our cutters are built to last, crafted from a single piece of ultra-rugged steel that is fully boxed and continuously welded. This meticulous construction ensures unparalleled durability. Additionally, our unique powder coating process further enhances their longevity, setting our cutters apart from the rest.



**SSAB**



## WE DO ONE THING—AND WE DO IT WELL.

At Brush Wolf, we're masters of our craft, focusing solely on perfection. Our indestructible hydraulic rotary brush cutters are built tough to conquer rough terrain and thrive in the harshest environments. With a legacy that spans over two decades, we've been the pioneers of the rotary brush-cutting industry, setting the standard for innovation.

We're proud to make, design, fabricate, assemble, powder coat, and test every cutter under one roof in Crosslake, Minnesota.




# STANDARD-DUTY X-SERIES

3600X | 4200X | 4800X LF | 4800X SF | 4800X HF


These bulletproof little machines are packed with power and are perfect for clearing steep hillsides, ditches, and tree lines. Our first-generation rotary brush cutters for diggers feature a simplistic design that makes them easy to own and operate. The 3600X and 4200X are made for compact excavators and backhoes to fit flawlessly in tight places. While the 4800X models fit either compact or mid-size excavators/backhoes and offer a 48" cutting width.

***"THIS CUTTER HAS BEEN A GREAT INVESTMENT AND REALLY RELIABLE."***

— Clivan,  
Construction  
Business Owner



**BLADE CARRIER:** 3600X

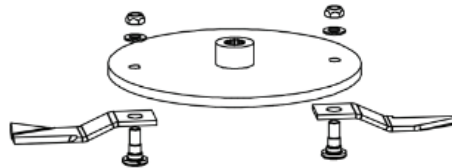

**BLADE CARRIER:** 4200X | 4800X



**MOTOR TYPE**

Eaton® Geroler-style hydraulic motor

**DRIVE TYPE**


Right-angle Omni Gear® gearbox

**MOTOR PROTECTION**

Pressure relief valves, GRD-2 shear bolt

**MAX PSI (CONT./INT.)**

3,000/3,500; 3,000-4,100 (4800X HF)



**DECK THICKNESS**

3600X & 4200X: 10-ga | 4800X: 7-ga

**HOOD/MOTOR GUARD**

12-ga motor guard

**CHAIN CURTAIN**

Both sides

**HOSES + DUST CAPS**

90" hydraulic hoses encased in protective wrap, quick-connect couplers, and dust caps included



**BLADES & BLADE CARRIER**


**3600X:** Two 1/2" steel bars with 2 Hardox® 500 flat blades; non-updraft to cut and discharge material quickly

**4200X | 4800X:** 1" GRD-50 bar with 2 heat-treated, Supertuf coated drop-down blades; updraft for lift and mulching action

**BLADE ROTATION**

Counterclockwise



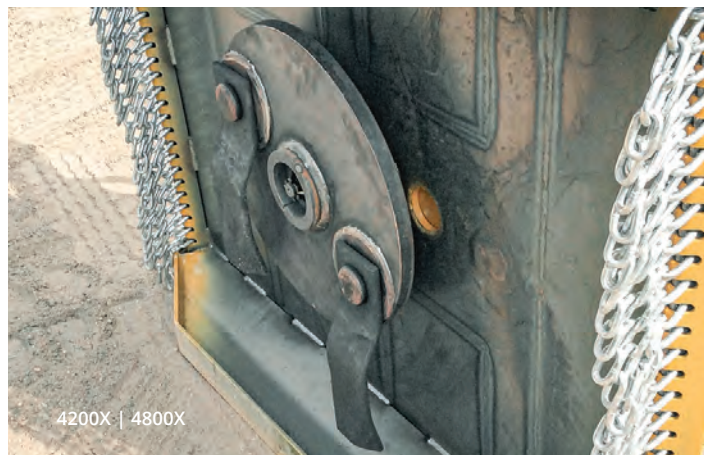

	MODEL OPTIONS				
	3600X	4200X	4800X LF	4800X SF	4800X HF
<b>Cutting Width</b>	36 in	42 in	48 in	48 in	48 in
<b>Hydraulic Flow (GPM)</b>	8-20	8-20	8-15	16-25	26-40
<b>Max Cutting Diameter</b>	3 in	3 in	3 in	4 in	5 in
<b>Tip Speed (ft/min)</b>	5,500-13,750	6,500-16,200	7,500-14,000	11,750-18,400	7,500-11,600
<b>Weight</b>	550 lbs	690 lbs	860 lbs	860 lbs	890 lbs

Full specs are listed on pages 12-13.

# HEAVY-DUTY X-SERIES

42X HD | 42X XP | 48X HD | 48X XP

Up your brush-cutting game with the next generation of rotary cutters for mini and mid-size excavators/backhoes. We've upgraded our heavy-duty cutters with a powerful piston motor for higher torque and included a hydraulic relief block with an integrated case drain. The now removable chain curtains accommodate different cutting styles, and the vented, hinged hood improves drive-train protection. Big in power, yet still the right size to squeeze in tight spaces. A dependable, versatile cutter you'll use for virtually everything.



***"BRUSH WOLF PRODUCTS ARE OUTSTANDING & THEY STAND BEHIND THEIR PRODUCTS!! I OWN TWO CUTTERS, 1 FOR MY EXCAVATOR & 1 FOR MY SKID. WE LOVE IT!!! MY CUSTOMERS LOVE THE FINISH IT LEAVES ON THEIR PROPERTY TOO!!!"***

— Ellis Smallwood,  
Owner of Smallwood's Land Management LLC



#### **MOTOR TYPE**

SAI® radial piston hydraulic motor

#### **DRIVE TYPE**

Direct drive

#### **BEARING HOUSING SHAFT**

Eskridge® bearing housing with 2.25" shaft diameter

#### **MOTOR PROTECTION**

Pressure relief valves, case drain

#### **MAX PSI (CONT./INT.)**

3,500



#### **DECK THICKNESS**

42X: 10-ga | 48X: 7-ga

#### **HOOD/MOTOR GUARD**

SAI® radial piston hydraulic motor

#### **CHAIN CURTAIN**

Optional/removable chain curtains with 5/16" replaceable chains

#### **HOSES + DUST CAPS**

90" hydraulic hoses encased in protective wrap, quick-connect couplers, and dust caps included



#### **BLADES**

2 heat-treated, Supertuf coated drop-down blades; updraft for lift and mulching action

#### **BLADE CARRIER**

1" GRD-50 disc

#### **BLADE ROTATION**

Counterclockwise



**MODEL OPTIONS**


	42X HD	42X XP	48X HD	48X XP
<b>Cutting Width</b>	42 in	42 in	48 in	48 in
<b>Hydraulic Flow (GPM)</b>	14-20	21-29	17-29	30-37
<b>Max Cutting Diameter</b>	4 in	5 in	5 in	6 in
<b>Tip Speed (ft/min)</b>	9,500-13,500	10,200-14,200	9,500-16,300	8,600-10,600
<b>Weight</b>	750 lbs	750 lbs	800 lbs	800 lbs

Full specs are listed on pages 12-13.


# FULL-SIZE HEAVY-DUTY X-SERIES

60X HD | 60X XP | 72X HD | 72X XP

A true workhorse built tough for industrial and commercial applications. These bad boys clear brush quickly and efficiently to improve your ROI and increase profit. You can rely on these cutters to consistently tackle heavy brush and trees up to 10" in diameter.

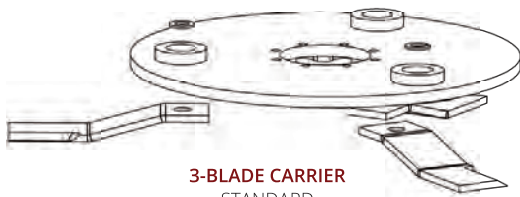

**3-BLADE CARRIER**  
STANDARD

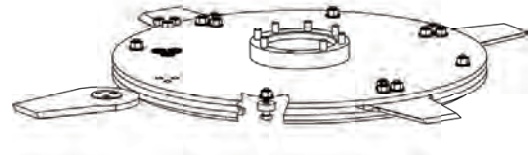

**4-BLADE CARRIER**  
OPTIONAL



**MOTOR TYPE**

SAI® radial piston hydraulic motor

**DRIVE TYPE**

Direct drive

**BEARING HOUSING SHAFT**


Eskridge® bearing housing with 2.25" shaft diameter

**MOTOR PROTECTION**

Pressure relief valves, case drain

**MAX PSI (CONT./INT.)**

4,000



**DECK THICKNESS**

1/4 in

**HOOD/MOTOR GUARD**

SAI® radial piston hydraulic motor

**CHAIN CURTAIN**

Optional/removable chain curtains with 5/16" replaceable chains

**HOSES + DUST CAPS**

90" hydraulic hoses encased in protective wrap, quick-connect couplers, and dust caps included



**BLADES**

**Standard 3-Blade Carrier**

1" GRD-50 disc with 3 heat-treated, Supertuf coated drop-down blades; non-updraft to cut and discharge material quickly

**Optional 4-Blade Carrier**

Two-piece 5/8" thick steel discs with 4 Hardox® 500 flat blades; non-updraft to cut and discharge material quickly

**BLADE ROTATION**

Counterclockwise




#### MODEL OPTIONS

	60X HD 3-Blades	60X XP 3-Blades	60X HD 4-Blades	60X XP 4-Blades	72X HD 3-Blades	72X XP 3-Blades	72X HD 4-Blades	72X XP 4-Blades
<b>Cutting Width</b>	60 in	60 in	60 in	60 in	72 in	72 in	72 in	72 in
<b>Hydraulic Flow (GPM)</b>	20-32	33-45	20-32	33-45	23-32	33-45	23-32	33-45
<b>Max Cutting Diameter</b>	10 in	10 in	10 in	10 in	10 in	10 in	10 in	10 in
<b>Tip Speed (ft/min)</b>	9,500- 15,100	12,200- 16,600	9,500- 15,100	12,200- 16,600	10,300- 14,300	13,200- 18,000	10,300- 14,300	13,200- 18,000
<b>Weight</b>	1,730 lbs	1,730 lbs	1,940 lbs	1,940 lbs	2,080 lbs	2,080 lbs	2,330 lbs	2,330 lbs

Full specs are listed on pages 12-13.

# BRUSH CUTTERS

FOR EXCAVATORS AND BACKHOES



	STANDARD-DUTY					HEAVY-DUTY	
	3600X	4200X	4800X LF	4800X SF	4800X HF	42X HD	42X XP
<b>Hydraulic Flow (GPM)</b>	8-20		8-15	16-25	26-40	14-20	21-29
<b>Tip Speed (ft/min)</b>	5,500-13,750	6,500-16,200	7,500-14,000	11,750-18,400	7,500-11,600	9,500-13,500	10,200-14,200
<b>Max Cutting Diameter</b>	3 in			4 in	5 in	4 in	5 in
<b>Cutting Width</b>	36 in	42 in	48 in			42 in	
<b>Weight</b>	550 lbs	690 lbs	860 lbs		890 lbs	750 lbs	
<b>Overall Width</b>	39 in	45.13 in	51.13 in			52.70 in	
<b>Overall Length</b>	50 in	56.80 in	62.80 in			56.80 in	
<b>Blades</b>	(2) 10 x 6 x 0.625 in		(2) 14.75 X 4 X 0.5 in; updraft				
<b>Chain Curtain(s)</b>	Both sides					Optional/removable	
<b>Hood/Motor Guard</b>	12-ga motor guard					12-ga hinged, vented hood	
<b>Max PSI (cont./int.)</b>	3,000/3,500				3,000/4,100	3,500	
<b>Blade Carrier Type</b>	Two 1/2" steel bars		1" GRD-50 disc				
<b>Motor Type</b>	Eaton® Geroler-style hydraulic motor					SAI® radial piston hydraulic motor	
<b>Drive Type</b>	Right-angle gearbox					Direct drive	
<b>Bearing Housing Shaft</b>	—					Eskridge® bearing housing with 2.25" shaft diameter	
<b>Motor Protection</b>	Pressure relief valves, GRD-2 shear bolt					Pressure relief valves, case drain	
<b>Deck Thickness</b>	10-ga (.135 in)		7-ga (.188 in)			10-ga (.135 in)	
<b>Hoses &amp; Dust Caps</b>	90" hoses with protective wrap, dust caps						
<b>Warranty</b>	5-year limited warranty: structural components, materials, and weldment 1.5-year limited warranty: motor, gearbox, and bearing housing						

## PRODUCT SPECIFICATIONS



HEAVY-DUTY		FULL-SIZE HEAVY-DUTY							
48X HD	48X XP	60X HD 3-Blades	60X XP 3-Blades	60X HD 4-Blades	60X XP 4-Blades	72X HD 3-Blades	72X XP 3-Blades	72X HD 4-Blades	72X XP 4-Blades
17-29	30-37	20-32	33-45	20-32	33-45	23-32	33-45	23-32	33-45
9,500-16,300	8,600-10,600	9,500-15,100	12,200-16,600	9,500-15,100	12,200-16,600	10,300-14,300	13,200-18,000	10,300-14,300	13,200-18,000
5 in	6 in	10 in							
48 in		60 in				72 in			
800 lbs		1,730 lbs		1,940 lbs		2,080 lbs		2,330 lbs	
55.60 in		72.25 in				82.188 in			
62.812 in		74.50 in				86.813 in			
(2) 17.75 X 4 X 0.5 in; updraft		(3) 18 x 5 x 0.625 non-updraft drop-blades		(4) 14.25 x 8.5 x 0.625 Hardox® 500 non-updraft flat-blades		(3) 18 x 5 x 0.625 in non-updraft drop-blades		(4) 18 x 8.5 x 0.625 Hardox® 500 non-updraft flat-blades	
Optional/removable									
12-ga hinged, vented hood									
3,500		4,000							
1" GRD-50 disc				Two-piece 5/8" steel discs		1" GRD-50 disc		Two-piece 5/8" steel discs	
SAI® radial piston hydraulic motor									
Direct drive									
Eskridge® bearing housing with 2.25" shaft diameter									
Pressure relief valves, case drain									
7-ga (.188 in)		1/4 in							
90" hoses with protective wrap, dust caps									
5-year limited warranty: structural components, materials, and weldment 1.5-year limited warranty: motor, gearbox, and bearing housing									



**5** YEAR  
LIMITED  
WARRANTY

Brush Wolf cutters are built for life, which is why we stand behind each and every one of them with our unmatched 5-year limited warranty.

MADE IN  
**USA**

Everything we make, design, fabricate, assemble, powder coat, and test is proudly done under one roof in Crosslake, Minnesota.



**THE LEADER OF THE PACK—ANY WAY YOU CUT IT.**

218-692-1050 | [sales@brushwolf.com](mailto:sales@brushwolf.com) | [brushwolf.com](http://brushwolf.com)